


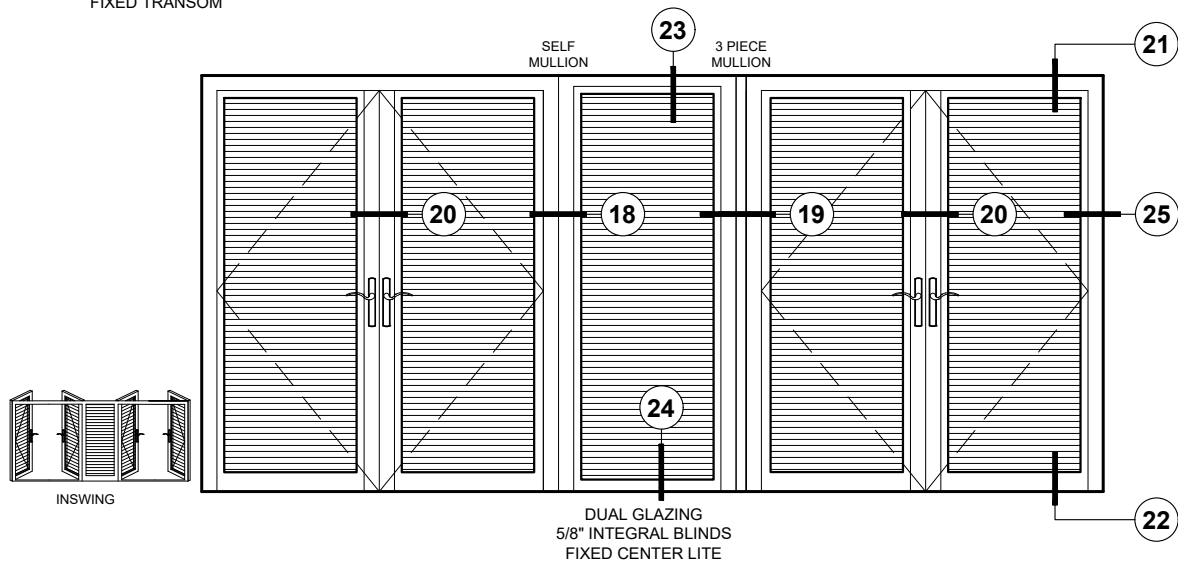
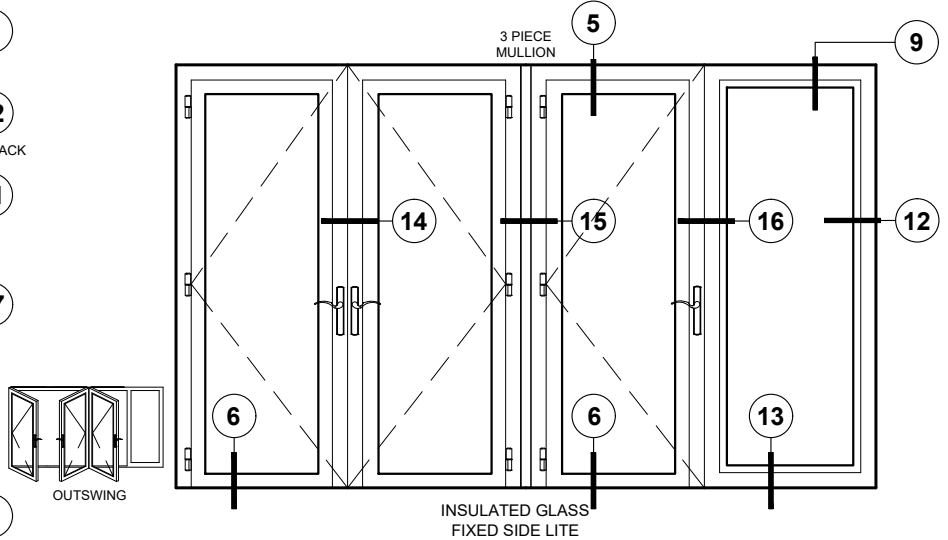
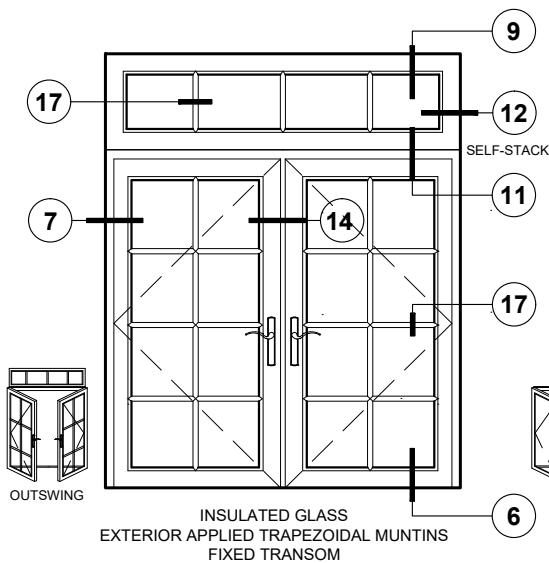
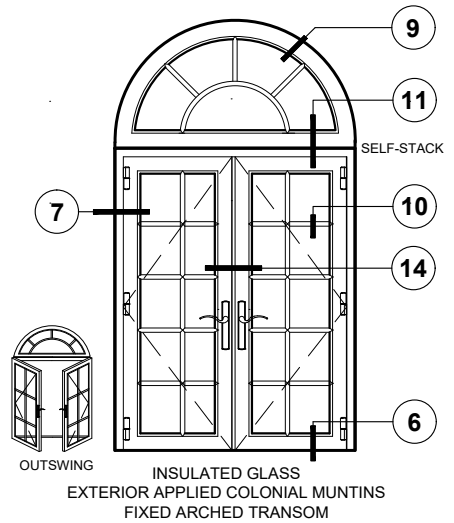
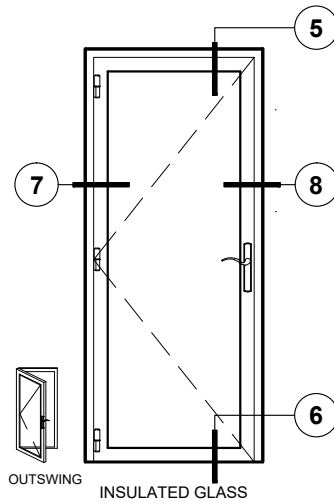
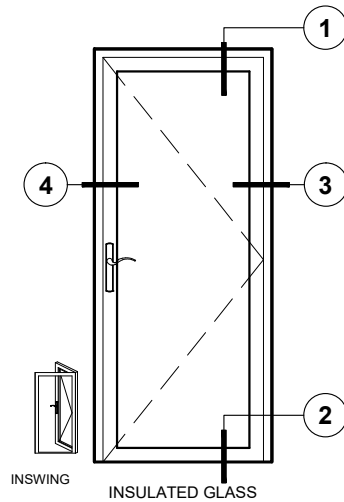
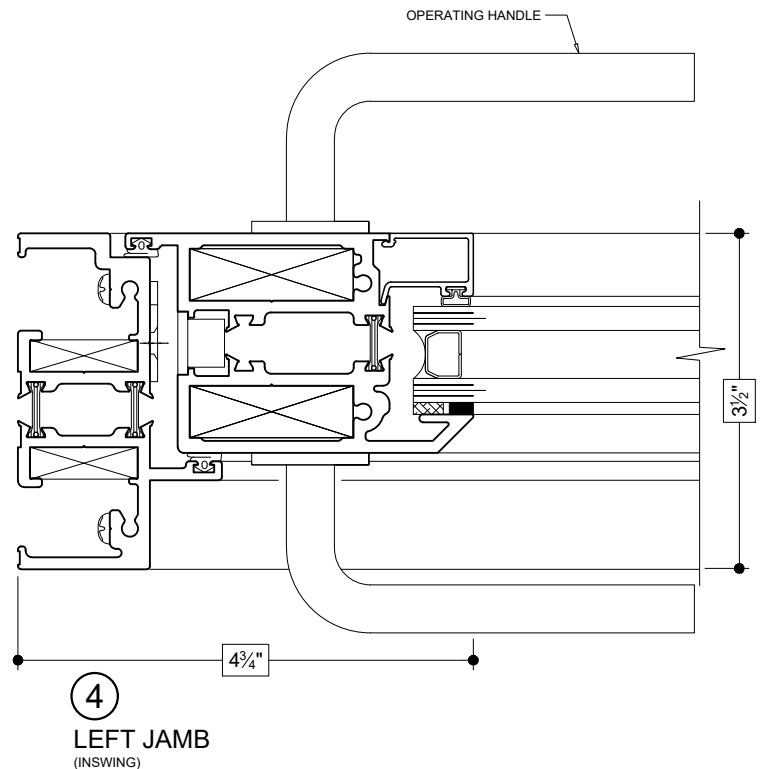
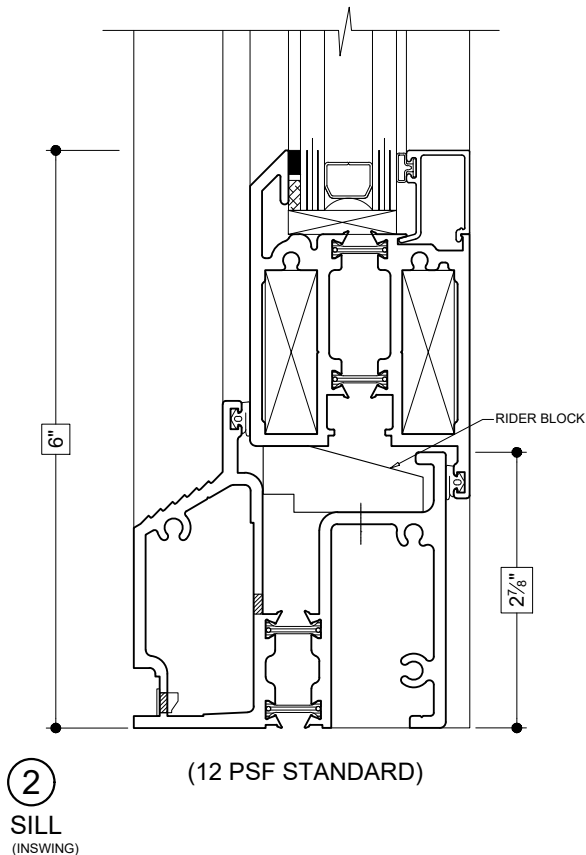
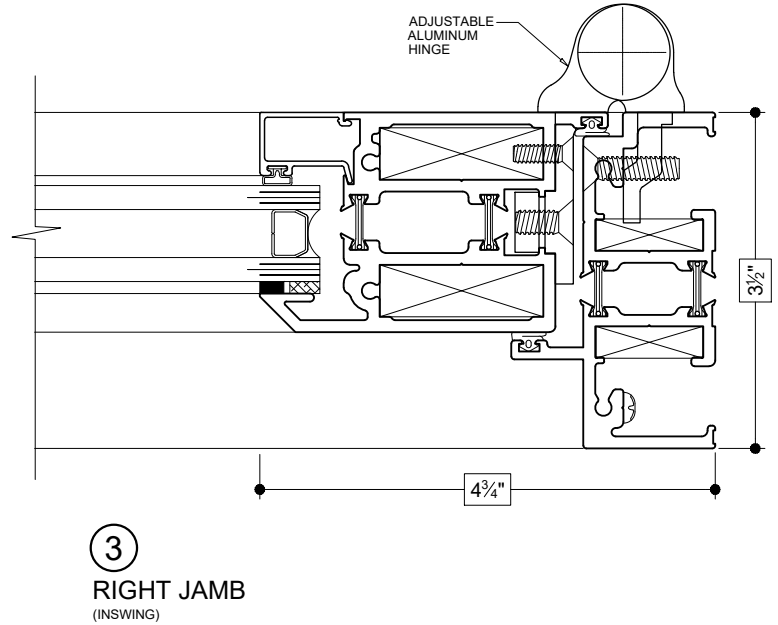
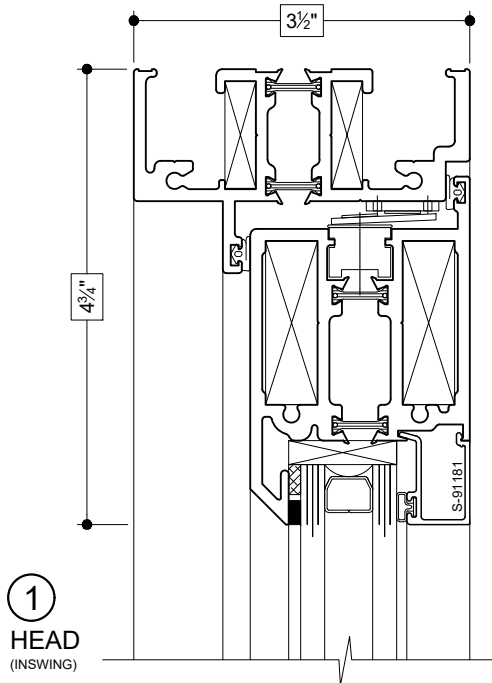
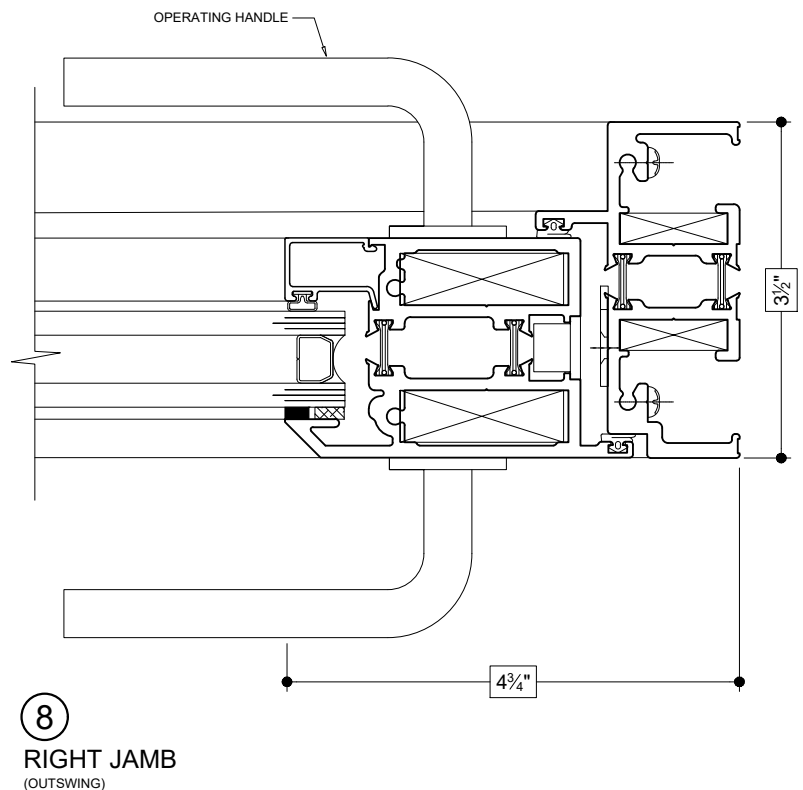


Details shown reflect the most commonly used configurations.
Contact AWM for additional details and/or assistance.

08/07/19

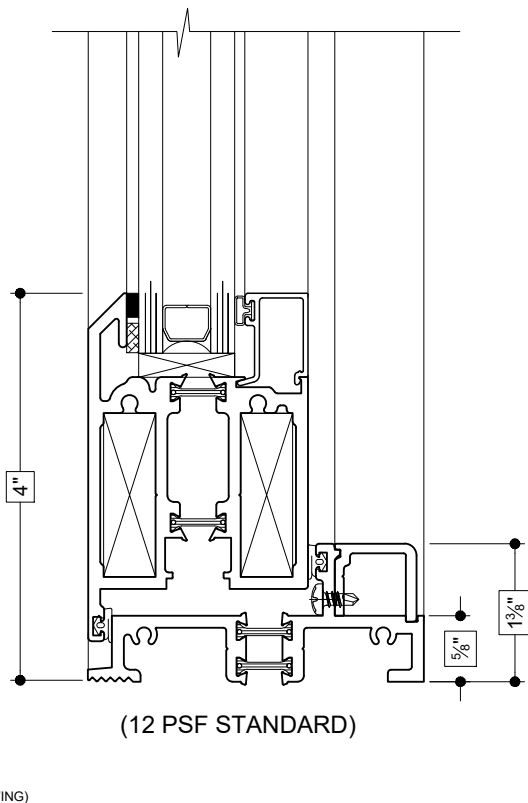

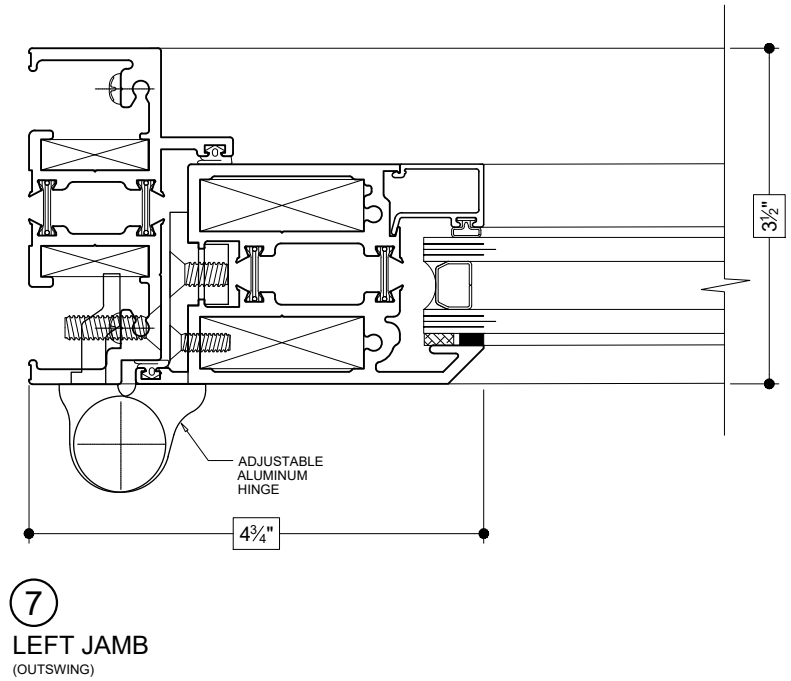


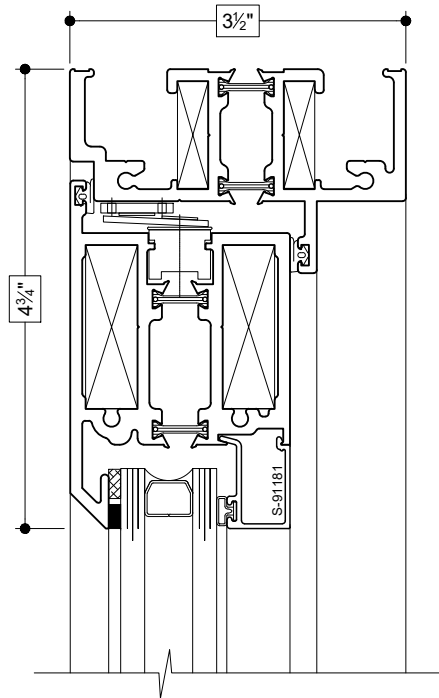


Details shown reflect the most commonly used configurations.
Contact AWM for additional details and/or assistance.

08/07/19


9
HEAD
(FIXED)

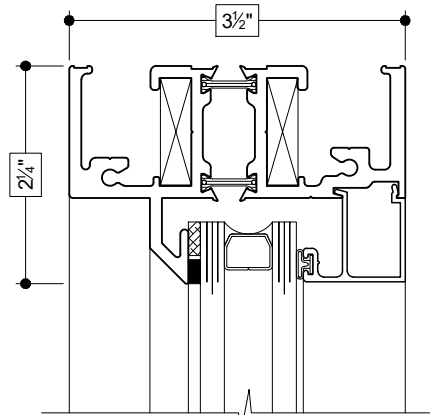


10
APPLIED MUNTIN
(COLONIAL)

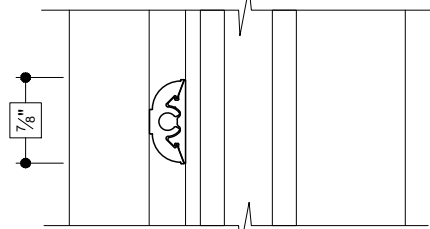


11
SELF-STACK
(FIXED OVER OUTSWING)

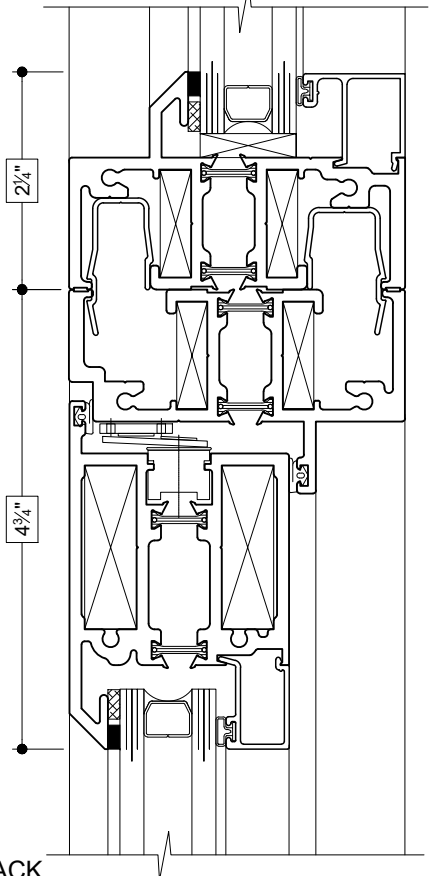

12
RIGHT JAMB
(FIXED)


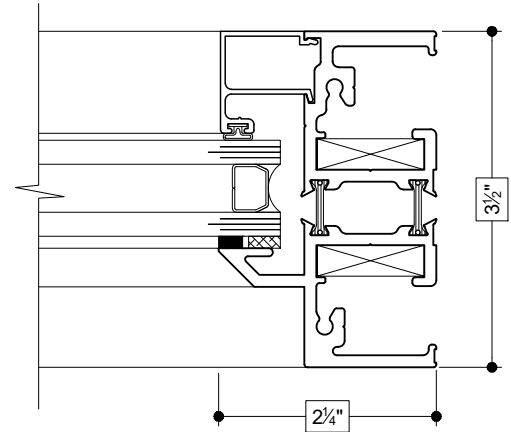




13
SILL
(FIXED)

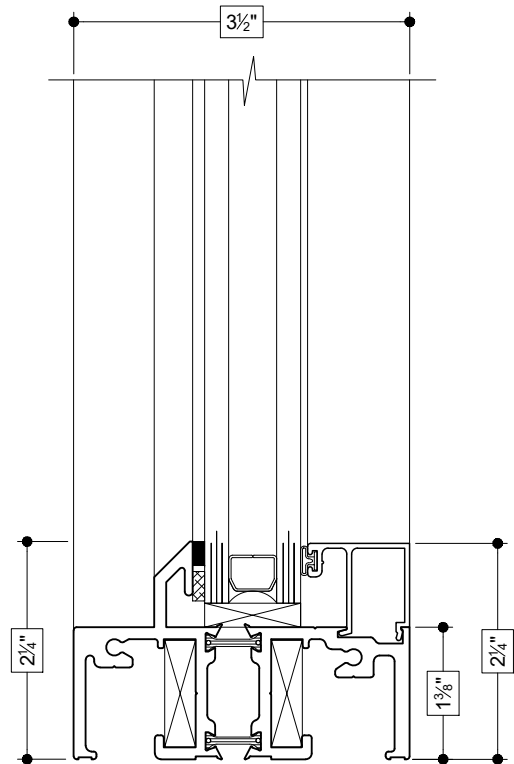

Details shown reflect the most commonly used configurations.
Contact AWM for additional details and/or assistance.


08/07/19

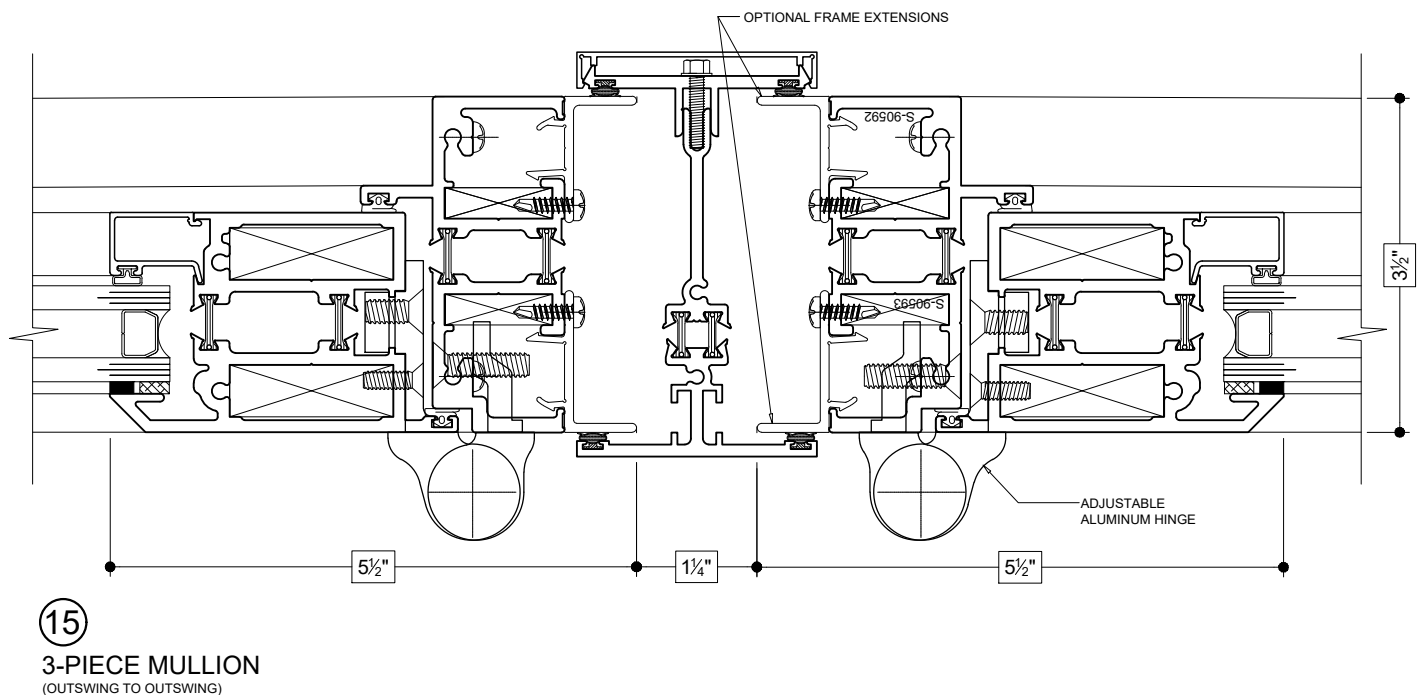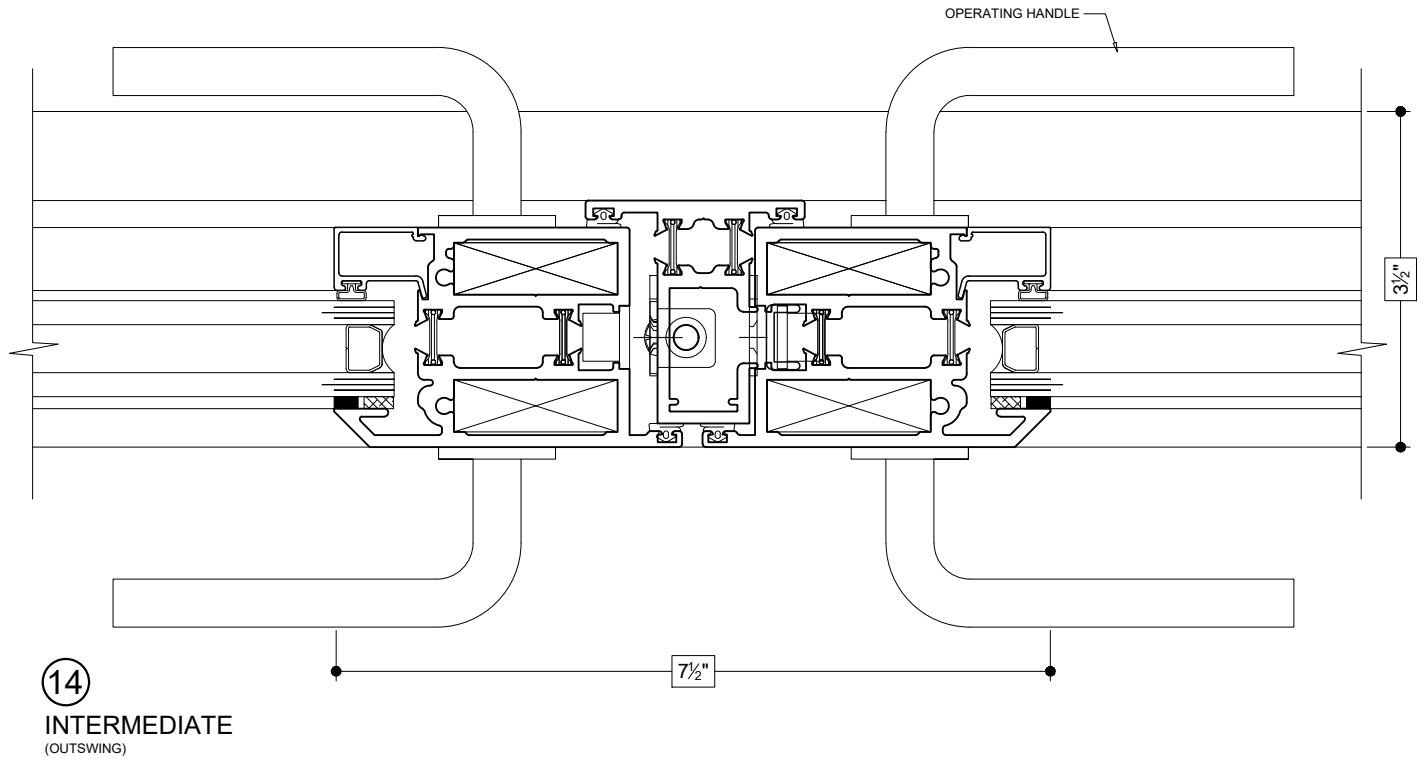

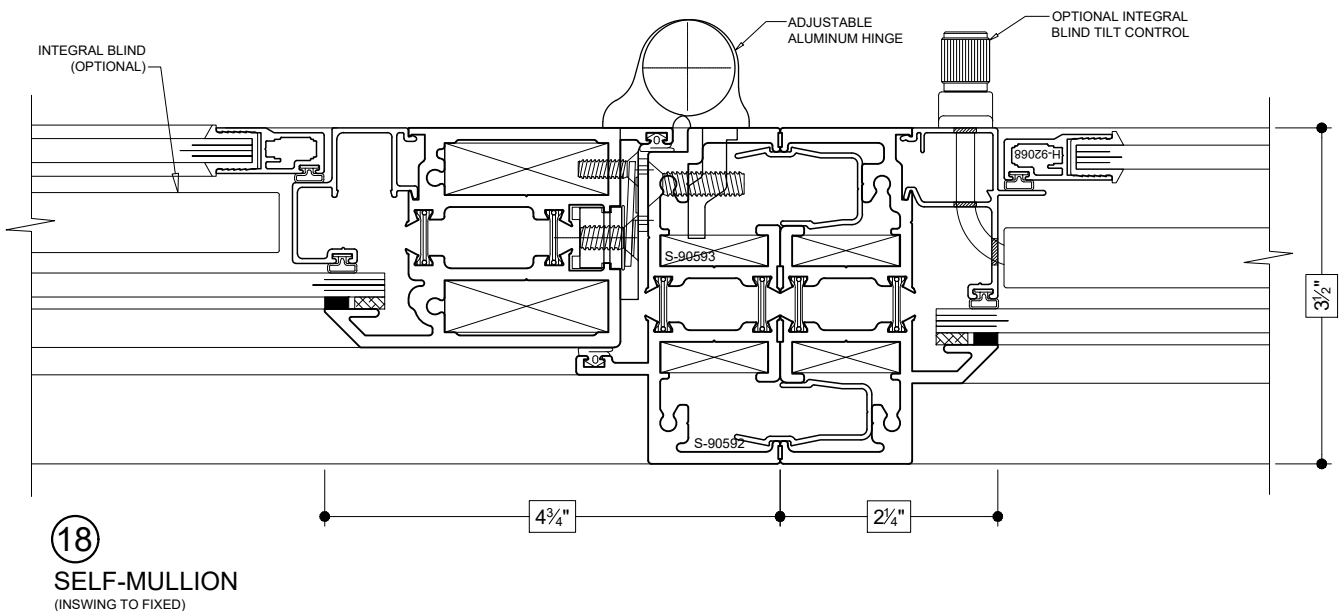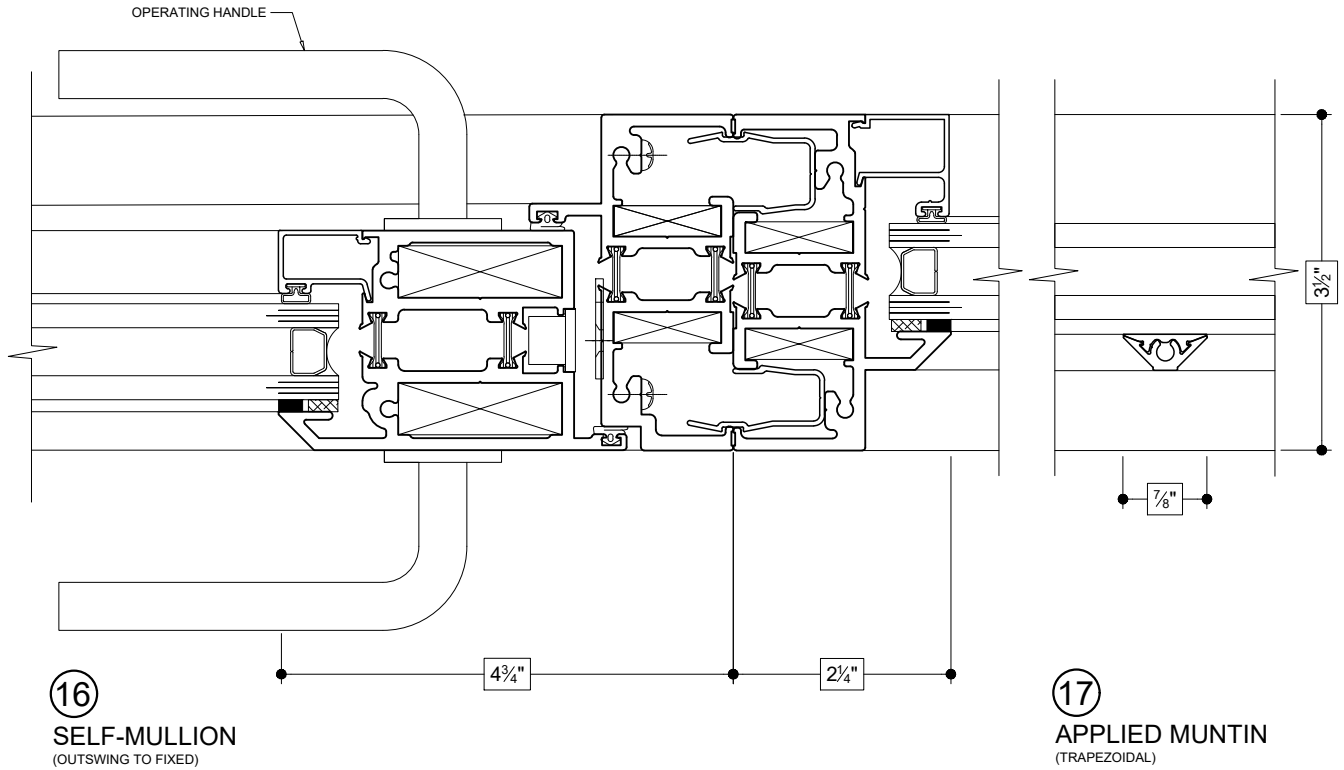


Details shown reflect the most commonly used configurations.
Contact AWM for additional details and/or assistance.



08/07/19

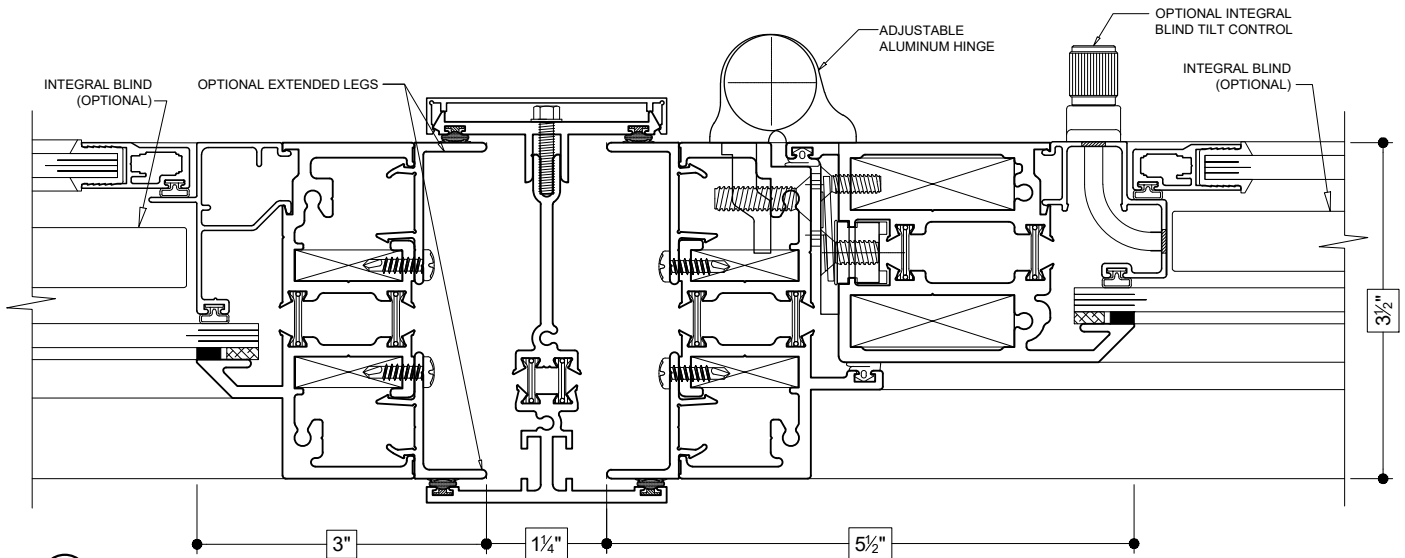


19
3-PIECE MULLION
(FIXED TO INSWING)

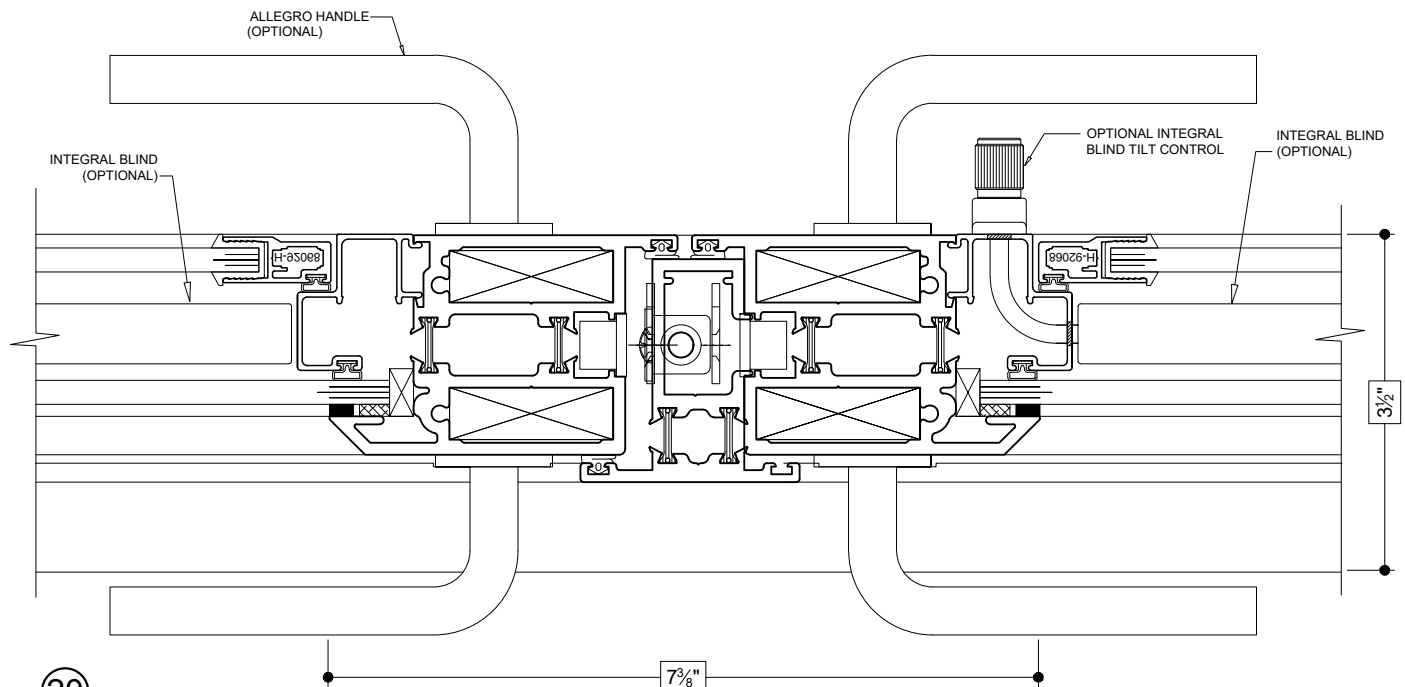


20
INTERMEDIATE
(INSWING)

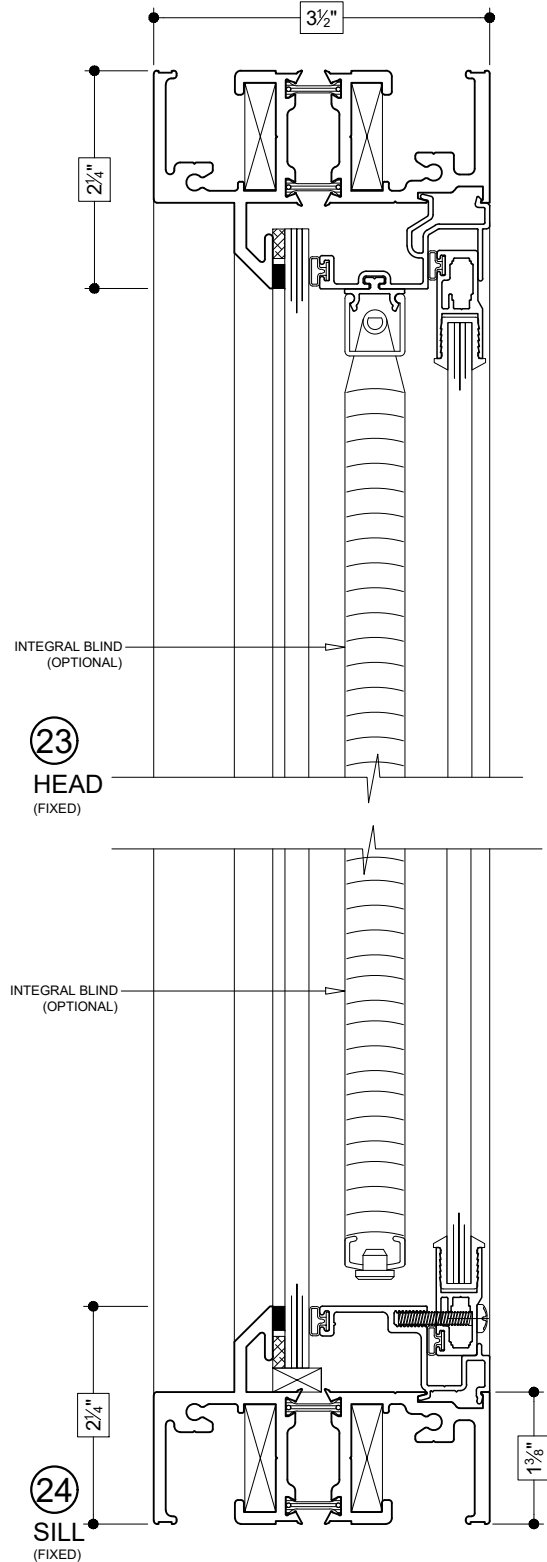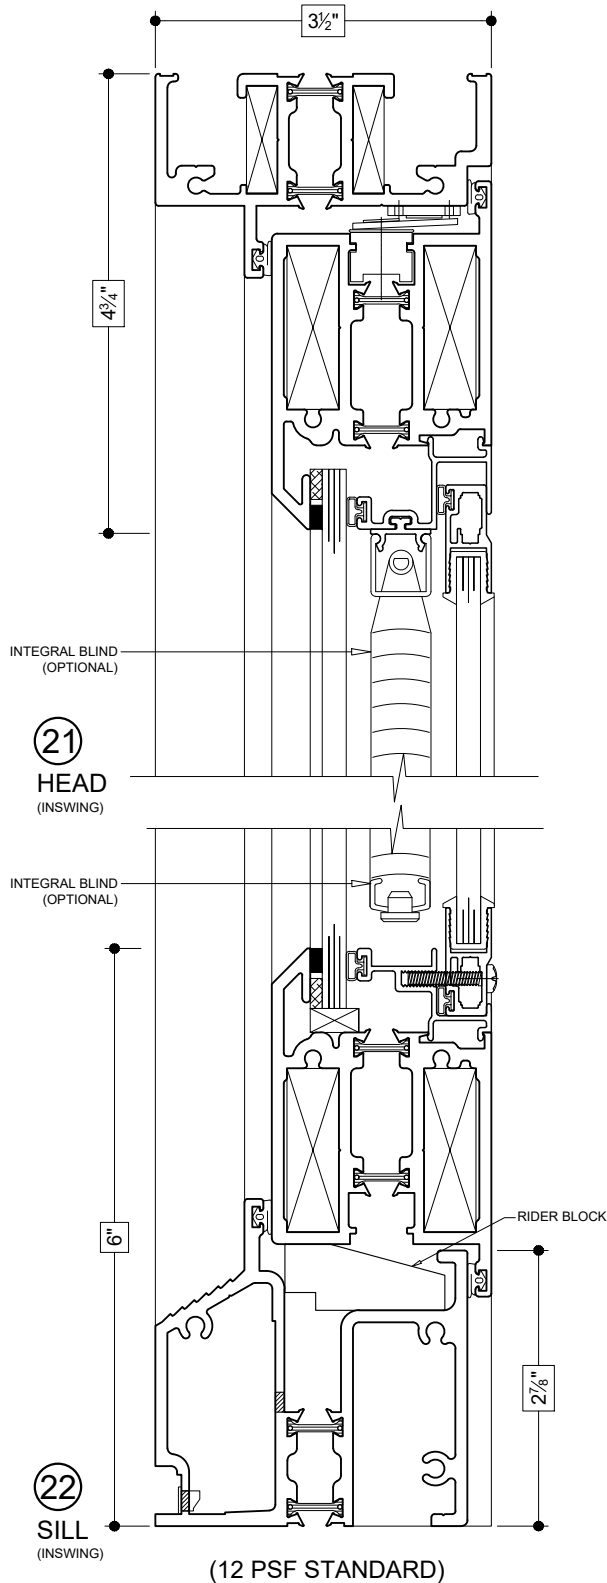


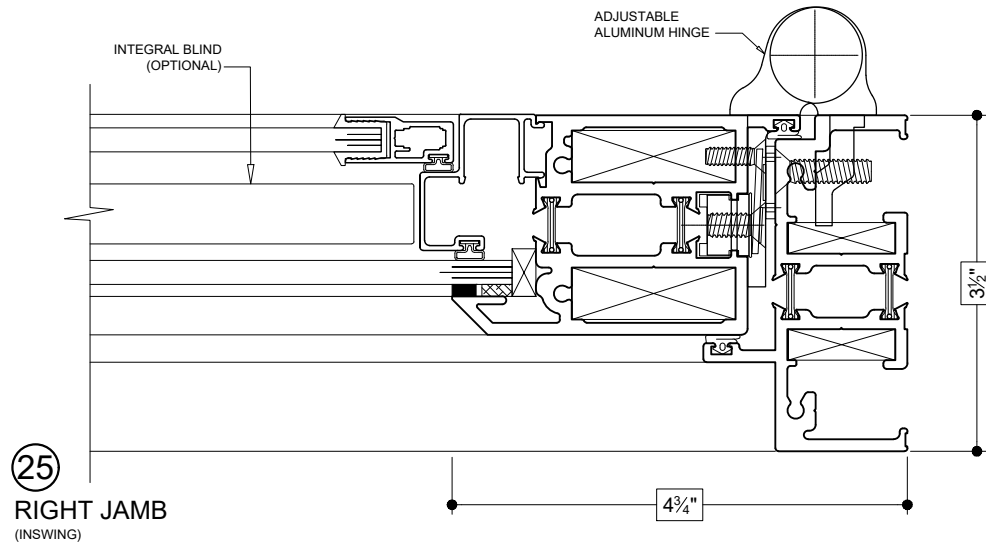


OPTIONAL SILL FRAMES

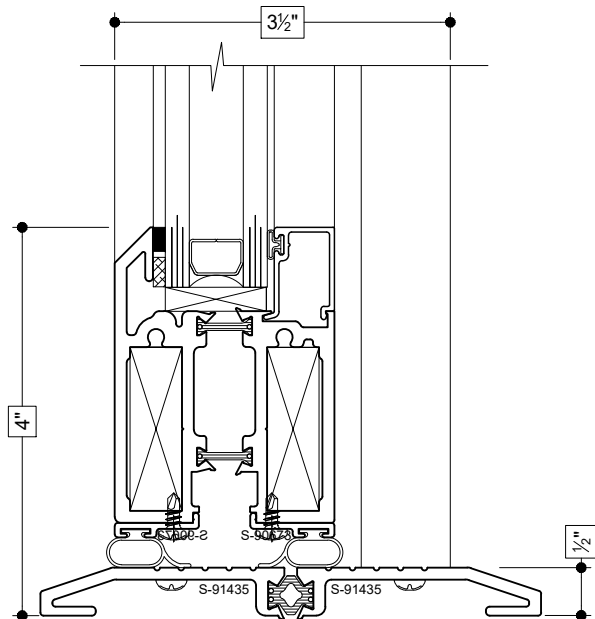


0 PSF SILL
(OUTSWING)

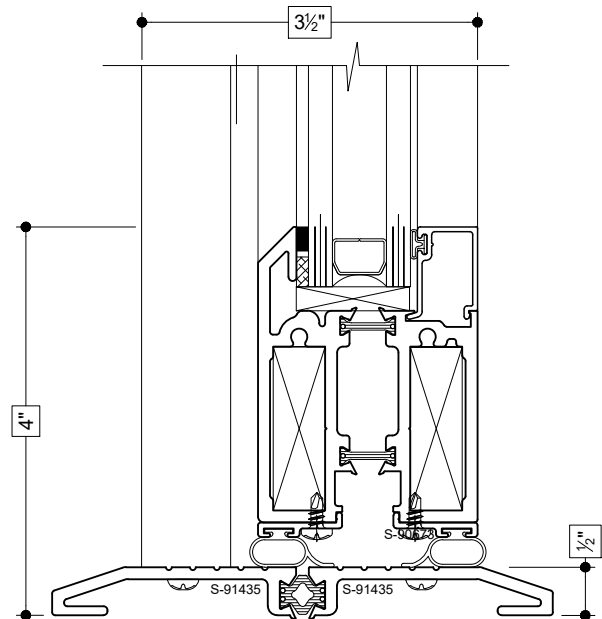

0 PSF SILL
(INSWING)

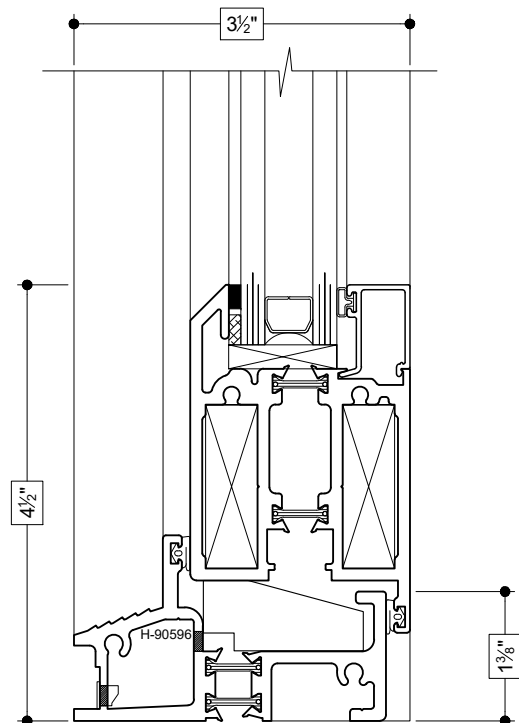

4.5 PSF SILL
(INSWING)

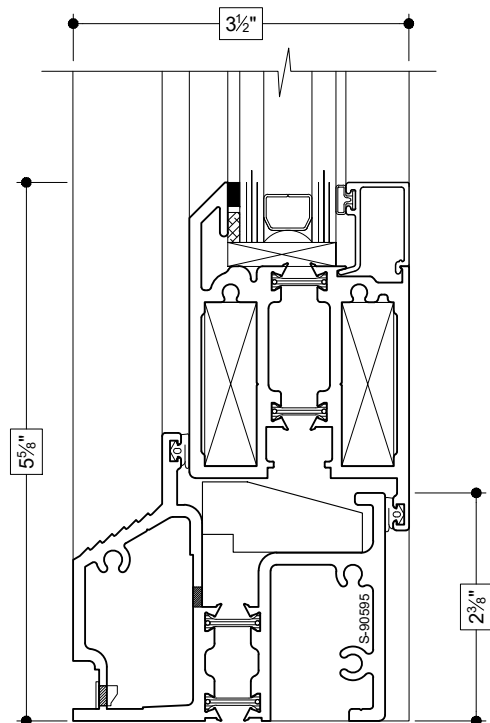

10 PSF SILL
(INSWING)

OPTIONAL BOTTOM RAILS

